

# Cable reels

PHASAK's professional cable reels have a broad history in the market and years of experience in the professional and industrial sector.



Manufactured in Category 6 and 6A, the most popular categories that offer a more stable and reliable connection, being the favorite option for most installers for long distances. PHASAK coils guarantee compatibility with lower categories.

Bet on our certified 100% Copper model for complex and institutional installations or opt for the excellent performance and efficiency of CCA coils.



PHASAK

WARRANTY

3

YEARS

# PHR 660 [Cu · Certificate]

Cat 6A · S-FTP · LSZH · AWG24 · Sólido · 305m

PHASAK box of 305 Cu meters, UTP, Solid, LSZH and Category 6 boxed with Fluke Test certificate. Supports transfer speeds up to 10 Gbps.



## Data Sheet

**Type:** U/UTP LSZH

**Category:** Cat.6

**Conductor material:** Cu

**AWG:** 24AWG

**Color:** White

**Length:** 305M

EN 60332-1-2:2014+A11:2016,

EN 50288-9-1

PHR 660 · CAT6A S-FTP LSZH 24AWG Cu		
Certificación	Fluke Test	Si
Características	Material Conductor	Cu - Cobre
	Diámetro	1.35 mm
	Blindaje	S/FTP Sólido
	AWG	23
	Material funda	LSZH
	Longitud	305 M
	Tipo de cable	Redondo
	Especificación	Cat.6A
Blindaje	1 st	60um Al foil for each pair
	2 nd	96*0.12mm AL-MG braiding net
Recubrimiento	Material	PVC jacket
	Thickness	0.7±0.01mm
	Diameter	8.0±0.5mm

## Address / Dirección / Endereço

Carretera del Río 6, Villalarbo (Zamora, España) · 49159

## Telephone Number / Número de teléfono / Número de telefone

+34 980 53 94 99

## E-mail address / Dirección de email / Direção de e-mail

info@phasak.com

## Product / Producto / Produto

Network Cable S-FTP Cat.6A - **PHR 660**

## PHASAK

Certifies that the product complies with the regulations in force.

Certifica que el producto cumple con las normativas vigentes.

Certifica que o produto está em conformidade com os regulamentos em vigor.

## Test Report for Reaction to fire

EN 60332-1-2:04+A1:15+A11:16,

EN 60332-1-1:04+A1:15

## Restriction of Hazardous Substances (RoHS)

2011/65/EU Economic operators

## Person responsible / Persona responsable / Pessoa responsável

Madrid, Spain - 05.01.2023

Juan P. Rodriguez


CEO



## Product Specification

Especificaciones del producto  
Especificação do produto

Configuration & Physical		
Conductor	Material	Pure Cooper
	ID	0.574±0.01mm
Insulation	Material	Foam PE
	Diameter	1.35 mm
Twisted	Pair 1 - Blue/White-Blue	Twist Pitch: 16.84mm
	Pair 2 - Orange/White-Orange	Twist Pitch: 8.95mm
	Pair 3 - Green/White-Green	Twist Pitch: 10.6mm
	Pair 4 - ,Brown/White-Brown	Twist Pitch: 15.16mm
Shielding	1 st	60um Al foil for each pair
	2 nd	96*0.12mm AL-MG braiding net
Jacket	Material	PVC jacket
	Thickness	0.7±0.01mm
	Diameter	8.0±0.5mm

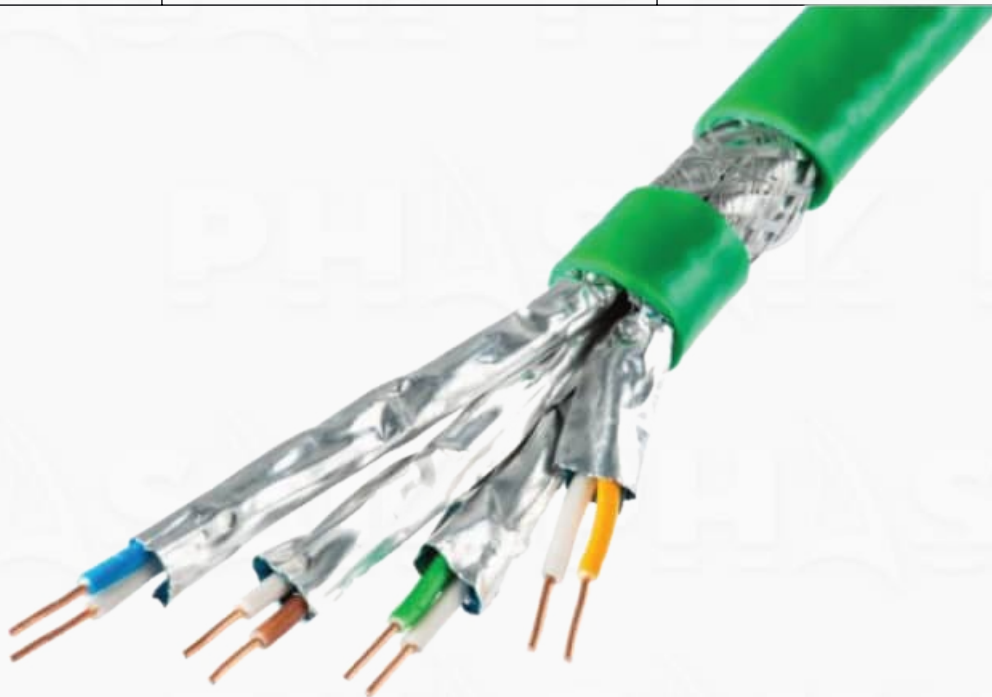

**PHR 660**